

SUPER NARROW BEZEL DISPLAY 47WV30MS / 47WV30BR




- Direct LED
- Panel Size : 47"
- Bezel to Bezel Size : 6.3mm
- Slim Depth : 91mm
- Power Consumption 160W (Typ), 30%↓ compared to competitor)
- Tile Mode : 15x15
- USB Playback → Low cost media player
- Hi Tni : 110°C (Competitors: 75°C)
- Shine-Out (47WV30MS) → High Visibility
- Brightness : 800nit (47WV30MS), 500nit (47WV30BR)
- 24 hours / 7 days Operation Support

KEY FEATURES




SLIMMER BEZEL & DEPTH

6.3-mm thick and 91-mm deep. The slim bezels create powerful and impactful video walls that can be easily installed, maintained and managed.

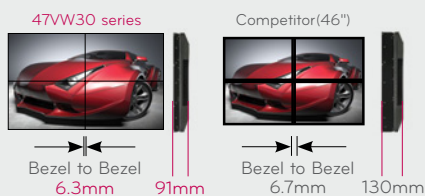


LED LOW POWER CONSUMPTION

By using LED panels without mercury or other harmful substances, 47WV30 series is eco-friendlier than any of its competitors. Most of all, 47WV30 series consumes less energy.

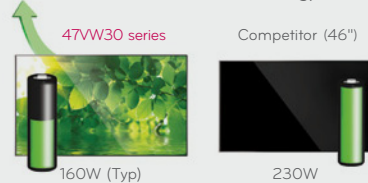

SHINE-OUT


Perfect fit for window display by reflecting away the sunlight for best image visibility and clearer display under direct sunlight than conventional panel.

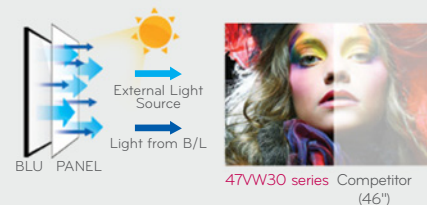

IPS SUPERB PICTURE QUALITY

NO BLACKENING DEFECT


Hardly affected by light or heat, hence no blackening.

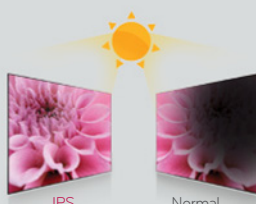

If outdoor temperature is 30° (86°F)
 Surface temperature of display is 85° (185°F)

TRUE WIDE


No color changes or distortion from any viewing angle



Color Change avg.@60°
 Gamma Change avg.@60°

STABLE PANEL

When touch the screen, it can also display consistently with leaving no mark.

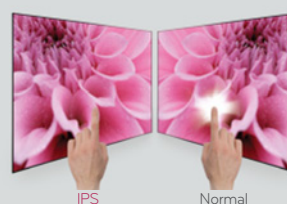

SIZE PREMIUM

47W is 10% larger than 46W, and the gap amounts to 8.4"





SPECIFICATION

| | 47WV30MS | 47WV30BR |
|----------------------------|----------------------------------|---|
| PANEL | Screen Size | 47" |
| | Panel Technology | IPS (LED BLU) |
| | Aspect Ratio | 16 : 9 |
| | Native Resolution | 1366 x 768(HD) |
| | Brightness | 800cd/m ² 500cd/m ² |
| | Contrast Ratio | 1,400:1 |
| | Dynamic CR | 500,000 : 1 |
| | Viewing Angle(H x V) | 178 x 178 |
| | Response Time | 12ms(G to G) |
| | CONNECTIVITY | Input (Rear) |
| Digital | | DVI, HDMI/DVI with HDCP |
| Analog | | AV(BNC, 1) Component(BNC), RGB |
| Audio | | RGB/DVI Audio, Component Audio(RCA) |
| External Control | | RS232C, RJ45, IR Receiver |
| USB | | Yes (x1) |
| Output (Rear) | | |
| Digital | | DVI without HDCP |
| Analog | | RGB |
| Audio | | External Speaker |
| External Control | RS232C | |
| PHYSICAL SPECIFICATION | Bezel Width | 3.9(left/top) / 2.4(right/bottom) mm |
| | Monitor Dimension(W x H x D) | 104.68cm X 59.16cm X 9.11cm |
| | Weight(head) | 29kg(63.93lb) |
| | Packed Weight | 34kg |
| | VESA™ Standard Mount Interface | 800 x 400 |
| SPECIAL FEATURES | Additional | Temp sensor, 15X15 Tile mode, 2 types of Handle, Shine out, USB playback |
| ENVIRONMENT CONDITIONS | Operation Temperature | 0°C ~ 40°C |
| | Operation Humidity | 10% ~ 80% |
| POWER | Power Supply | 100-240V~, 50/60Hz |
| | Power Consumption | |
| | Typical | 160W(Typ) |
| | DPMS | 1.0W(RGB), 1.0W(HDMI) |
| | Power Off | 0.5W |
| STANDARD(CERTIFICATION) | Safety | UL / c-UL / CB / TUV / KC |
| | EMC | FCC / CE / KCC |
| | ErP / Energy Star | Yes / Yes |
| MEDIA PLAYER COMPATIBILITY | Slot PC compatible (optional) | No |
| | External Media player Attachable | Yes |
| SOFTWARE COMPATIBILITY | Supersign Compatibility | Elite-W (lite) – control only |
| ACCESSORY | Included | Remocon, Power Cable, RGB Cable, DVI Cable, Manual(CD), Bolt(8Unit), IR Receiver, Guide Bracket |
| | Optional | Wall Mount |

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

DIMENSION

