



The Ultimate Visibility Enhancement

# BRIGHTEST OUTDOOR DISPLAY WX50MF



WX50MF 47"

## LED HIGH VISIBILITY High Brightness




## SHINE-OUT

Perfect fit for window display by reflecting away the sunlight for best image visibility and clearer display under direct sunlight than conventional panel.



## EASY TO CUSTOMIZE (OPEN FRAME)

WX50MF fits to any customer need and circumstance with its open frame. It can be designed according to customer request at an affordable price.

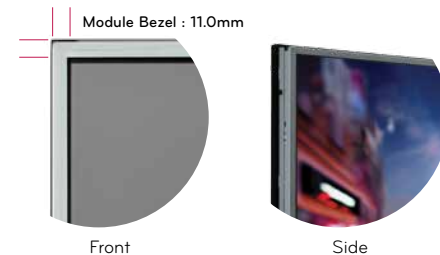

BRIGHTEST OUTDOOR DISPLAY

# WX50MF 47F"



Best Flat Panel Display for Outdoor Display  
heat resistance up to 230 degrees Fahrenheit and Shine Out Technology, making it a well-suited solution for delivering messages in outdoor spaces



## FEATURES

- LED (PD Panel)
- High Brightness : 2,000nit
- Shine-Out
- No Blackening Defect (Tni : 110°C)
- Easy Customization (Open Frame)
- Built-in FANs for Optimal Ventilation (Air Curtain Cooling)

## SPECIFICATIONS

WX50MF			
PANEL	Screen Size	47F" Class (46.96" measured diagonal)	
	Panel Technology	IPS	
	Aspect Ratio	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	
	Brightness	2,000nit	
	Contrast Ratio	1,300 : 1	
	Dynamic CR	500,000 : 1	
	Viewing Angle (H x V)	178 x 178	
	Response Time	8ms (G to G, *WOT)	
	CONNECTIVITY	Input (Rear)	
		Digital	HDMI(1), DVI(1), Display Port(1) with HDCP for all input
		Analog	Component(1), AV(1), RGB(1) (Shared with D-Sub)
Audio		PC / AV / Component Audio In(1)	
External Control		RS232C(1), RJ45(1)	
USB		USB(1)	
Output (Rear)			
Digital		DVI-D(1)	
Analog		Component(1), Composite(1), RGB(1) (Shared with D-Sub)	
Audio		External Speaker	
External Control		RS232C	
Audio			
Auto Volume	No		
Balance	Yes		
Audio Power	20W (10W x 2)		
Speaker On / Off	Yes		
Clear Voice II	Yes		
Sound Mode	Standard, Music, Cinema, Sports, Game		
PHYSICAL SPECIFICATION	Bezel Width	11mm	
	Monitor Dimension (W x H x D)	107.08cm x 66.55cm x 15.7cm	
	Weight (head)	23.9kg	

	Carton Dimensions (W x H x D)	118.2cm x 74.3cm x 26.9cm
	Packed Weight	29.1kg
	VESA™ Standard Mount Interface	N/A
SPECIAL FEATURES	Additional	Temp sensor, Ambient sensor, 15 x 15 Tile mode, Shine-out, Media Player integrated solution
ENVIRONMENT CONDITIONS	Operation Temperature	0°C - 40°C
	Operation Humidity	10% - 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving (on)	240W / 120W
	DPMS	1.0W (Set only)
	Power Off	0.5W
STANDARD(CERTIFICATION)	Safety	UR / cUR / CB scheme / TUV-Type
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	No
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	Yes
	External Media Player Attachable	No
SOFTWARE COMPATIBILITY	Supersign Compatibility	Elite-w / Elite-w lite
ACCESSORY	Included	Remote Controller, Power Cable, RGB Cable, Manual

\* WOT : Within Operation Temperature

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

## INTERFACE



## DIMENSION (unit : mm)

